


Metrotile Shingle 30-PA

The unique alternative to traditional shingle and slate.



Units in mm

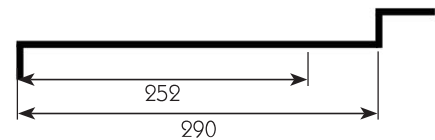

Design

The Metrotile Shingle profile is designed to get the same appearance as the traditional slates, with the additional benefits of steel roofing.

Metrotile Shingle is a stone-coated panel pressed from a high grade of Aluzinc® coated or equivalent steel and is available in a wide selection of colours to enhance any exterior colour scheme.

Installation

The tiling battens for installing the shingle tiles have to be positioned with a 250 mm spacing measured from the front batten of each batten up to the ridge.

Start at the bottom right hand side and work from right to left. Use 4 nails or screws to fix each shingle tile to the roof batten. If possible, use the cut-off from the previous to start the next course. Hook nose of upper tile into lip of tile below ensuring a tight fit. Continue with each successive course up.

At the upper course, cut the tiles to suit the ridge and attach a batten on top of the Shingle tile. Finally fix the ridge to the batten.

Specifications

Minimum pitch	16°
Maximum pitch	90°
Size of tile - overall*	1335 x 290 mm [\pm 3 mm]
Size of tile - cover*	1235 x 252 mm
Gauge of steel	0,45 mm
Linear cover width*	1235 mm
Coverage*	0,311 m ² (3,21 tiles per m ²)
Weight per m ²	6,43 kg
Weight per tile	2,00 kg

* The measurements and the weight may vary slightly by the finish that is added to the panel.

Packing

Pieces per pallet	420
Pallet composition	14 rows of 30 pieces
Pallet dimensions	1400 x 1100 mm x 800 mm