



Cover flashing

CF

Top course accessory for a nice finishing between the tiles and ridges.

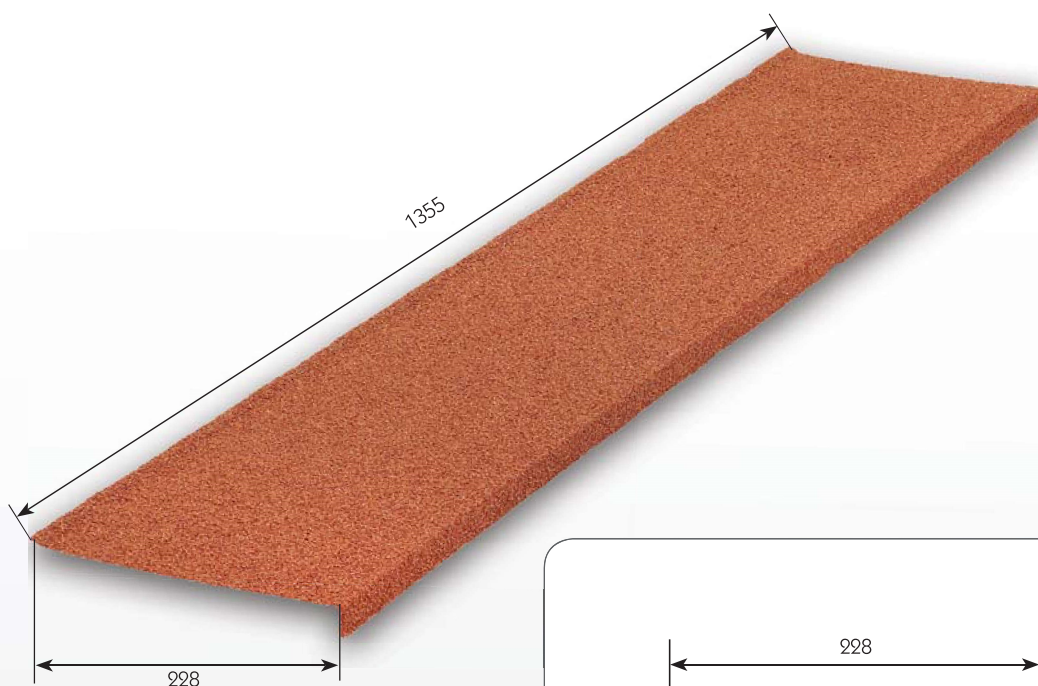

Units in mm

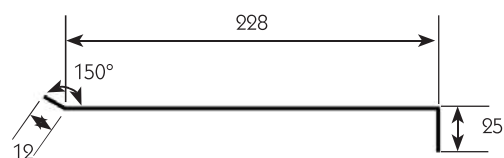

Design

The cover flashing is designed for sealing the top course of tiles to the ridges.

This accessory is compatible with all of the roofing panels except the Shingle.

It is pressed from ALUZINC 185 metal and available a wide range of colour in granules, satin, brilliance finish to comply with the rest of the roofing materials.

Application

The cover flashing is installed above the top course of tiles and under the rigde.

Specifications

Length*	1355 mm
Weight*	1,64 kg
Colours	See colour charts

* The measurements and the weight may vary slightly by the finish that is added to the accessory.

Packing

Pieces per pallet	480
Pieces per row in a pallet	60
Number of rows in a pallet	8
Pallet dimensions	1400 x 1100 mm
In boxes?	possible // 10 pieces/box